



**R24** is a high performance resin ribbon designed for the most demanding applications regarding resistance to mechanical aggressions and/or temperature and/or solvents. It is fully compatible with the label materials dedicated to the same high performance applications.

### PRINTING QUALITY

 90° Barcode = 95%  
Sharpness = 95%

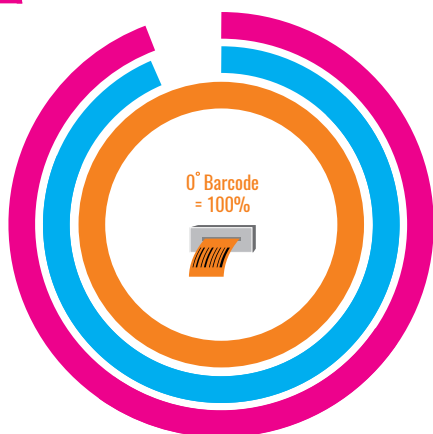


### Blackness Macbeth D19C



### SENSITIVITY

#### Printing Speed

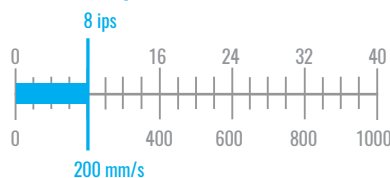

#### Energy




#### Receptor Compatibility

Uncoated papers	—
Coated papers	●
High gloss papers	● ●
Synthetics	● ● ●


### RESISTANCES

#### Mechanical Resistance


Crockmeter, 680g/cm<sup>2</sup>




#### Heat Resistance

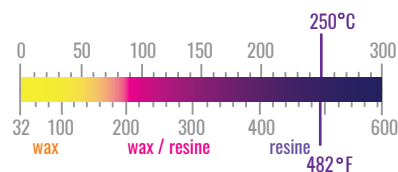

#### Other Resistances

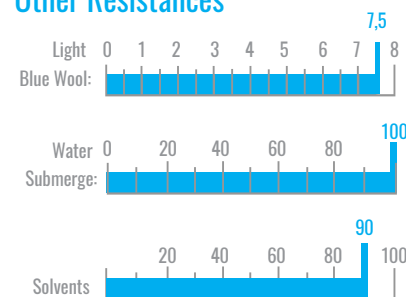

Rubtester: 939g, no damage after ... cycles :  
IPA: 140 Ethanol: 25  
Mineral Spirit: 50 Unleaded gasoline 98: nr\*  
Motor oil: 250 Brake fluid: nr\*  
\* not recommended

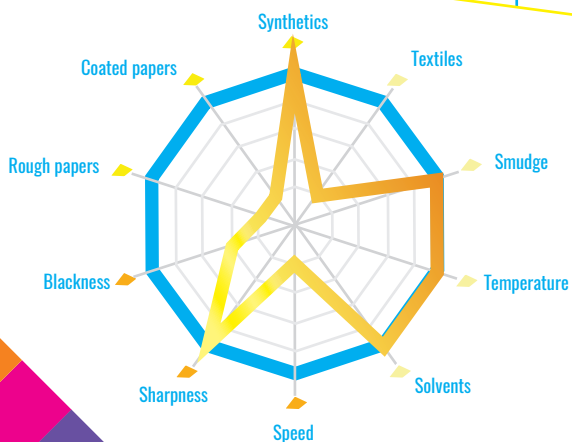

**LEGEND**  
 Durability  
 Compatibility  
 Performance